Our price offer: A07616000_A

Automatic production line for wire processing

17.06.2025
A07616000_A for Lisa Dräxlmaier / Satu Mare

Contact person Gluth:

Florian Schötz
Technical sales
E-Mail: schoetz.florian@gluth.eu
Tel : +49 9421 / 544-965
Mobil : +49 151 / 20832983

Radlbeck Ulrich
Technical sales
E-Mail: radlbeck.ulrich@gluth.eu
Tel: +49 9421 / 544-56
Mobil: +49 171 / 9493494

Contact person Dräxlmaier:

Thomas Eglseder
Purchase
E-Mail: Thomas.eglseder@draexlmaier.com
Tel : +49 8741 / 47 3574
Mobil : +49 152 / 2800 4115

Juhasz Levente
Engineering
E-Mail: Levente-istvan.juhasz@draexlmaier.com
Tel : +40 723 / 100 146
Mobil :

Modulare Automation
und Prüftechnik

DRÄXLMAIER


Gluth SYSTEM TECHNIK

Table of contents

1. Basics offer
2. Task description
3. Concept / Layout
4. Overview Processes
5. Control System
6. Performance criteria
7. Scope of delivery
8. Supplies Dräxlmaier
9. Miscellaneous
10. Project Schedule
11. Project Prices

Basics

Specifications received:

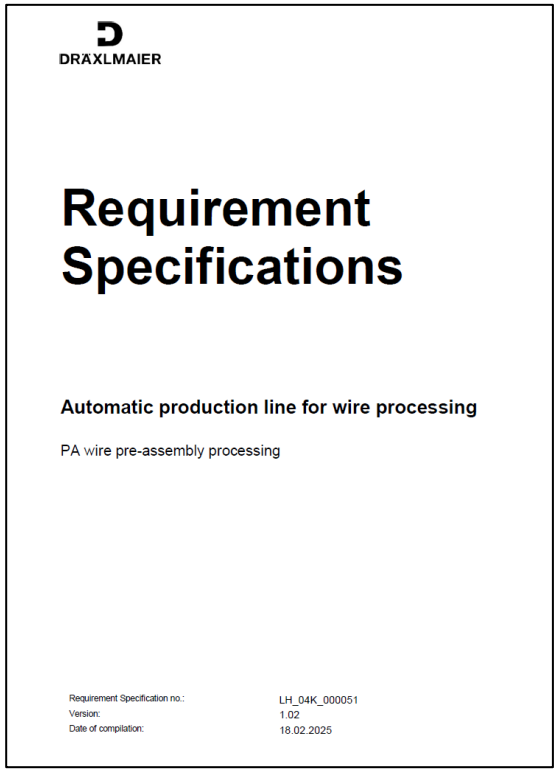

DRÄXLMAIER

Requirement Specifications

Automatic production line for wire processing

PA wire pre-assembly processing

Requirement Specification no.:	LH_04K_000051
Version:	1.02
Date of compilation:	18.02.2025

Order documents received:

Applicable documents	16.04.2025 09:28
Cables	17.04.2025 08:34
Crimp tools	16.04.2025 09:28
KP Images	17.04.2025 13:19
LH	16.04.2025 09:29
Terminals	16.04.2025 09:29
Bending tool examples.pdf	16.04.2025 09:28
Crimp presses with CFM.pdf	16.04.2025 09:28
Orientation Examples.pdf	16.04.2025 09:28
S8100052.tif	16.04.2025 09:28
Terminal Bending Examples.pdf	16.04.2025 09:28
Variants.xlsx	17.04.2025 13:26
Z1200019 (1.5mm) - Z1200020 (1.0mm...	16.04.2025 09:28
Applicable_Docs_CS_LH	15.04.2025 13:46
Applicable_Docs_CS_LH.7z	14.04.2025 15:14
LH_04K_000051_V1.02.pdf	24.03.2025 08:11

At the time of preparing the quotation, we had no further data on your products!

Should significant changes or additions to the current range of types arise in the course of the project, we reserve the right to offer these at a later date, with possible effects on price and delivery time, after consultation with you.

Gluth SYSTEM TECHNIK

Basics

2 Version information

Version	Date	Changes	Editror
1.00	24.07.2024	• First version	Juhasz Levente,OC235
1.01	27.08.2024	• Chapter 15.7 – Feeding speed has been modified to 0.1 – 20mm/sec • Chapter 15.7 – Feeding quantity has been inserted • Chapter 15.7 – Cooling time to be adjustable has been inserted.	Juhasz Levente,OC235
1.02	03.02.2025	• Chapter 4 – Table 2 has been updated • Chapter 7 – Table 4 has been updated • Chapter 8 – Table 5 has been updated • Chapter 10 – automatic cable cutting, electrical testing and labeling has been added • Chapter 11 – Table 9 has been updated • Chapter 15.1 – Scanner for material identification has been inserted • Chapter 15.4 – Cutting to length has been inserted • Chapter 15.10 – Electrical testing has been inserted • Chapter 15.11 – Labeling has been inserted	Juhasz Levente,OC235

Table 1: Version information

7 Project deadlines

Procedure	Date/period
Tender released	CW 07/2025 36/2024
Offer phase	CW 08/2025
Concept development phase, cost workshop, order quotation	CW 08-09/2025
Award of order	CW 10/2025
Availability of components	CW 10/2025
Production of sample components	CW 11/2025
Scheduled pre-inspection date at Contractor's plant	CW 50/2025
Relocation to production site	CW 02/2026
Commissioning at production site	CW 04/2026
Production readiness at production site	CW 05/2026
Expected final acceptance at the production site	CW 09/2026
SOP DRÄXLMAIER Group (start of series production)	CW 05/2026
EOP customer	2032

Table 4: Project deadlines

8 Ratios

Ratio	Value
Total quantity during the term (including Flex)	21.275.000 pcs.
Maximum quantity per year (including Flex)	2.600.000 pcs.
Maximum weekly quantity (including flex)	52.000 pcs.
Planned shift model	3 Shift operation, 5 Day week; 281.000 Minutes pro Year
Operators per shift	1 Person
Required machine cycle time / *station*	<6 sec.
Required overall throughput time (incl. part handling)	<42 sec.(1 end) / <84 sec.(2 ends)
Required system availability	>98 %
Setup time, specification by the principal (planned value)	≤ 5 min
Max. allowed system-related malfunctions per shift	≤ 4
Max. machine-related proportion of scrap	< 1 %
Brief description of the upstream process chain with parts logistics	Cable cutting
Brief description of the downstream process chain with parts logistics	Module assembly

Table 5: Ratios

11 Site profile

Characteristic	Value
Address	Romania DRM Dräxlmaier Romania Sisteme Electrice S.R.L. Str. Vulturului Nr. 34 RO-440268 Satu Mare
Climate	Heated hall – air-conditioned (+21 to 28°C), relative air humidity up to 90%
Allowed construction size	Max. 11000 x 7000 x 2200mm (L x W x H) (Deviations are to be specified by the supplier)
Allowed floor loading	Max. 8 t/m²
Available space	Length: 12 m; Width: 8 m; Height: 4 m
Max. entry portal (gates/floors)	Width: 4 m, height: 4 m
Width and height of aisles and transport routes	Width: 4 m, height: 4 m
Power supply	Max. 400V/100A or 230V/32A
Compressed air supply	Max. 8 bar

Change history offer

Change history offer:

Angebotsversion	Datum	Verantwortlicher	Änderungen	Bemerkungen
A07616000	08.10.2024	Rudolf Schano		Budget price offer
A07616000A	17.06.2025	Florian Schötz	Adjustments to specification V1.02	

Task description

9.2 Product drawing

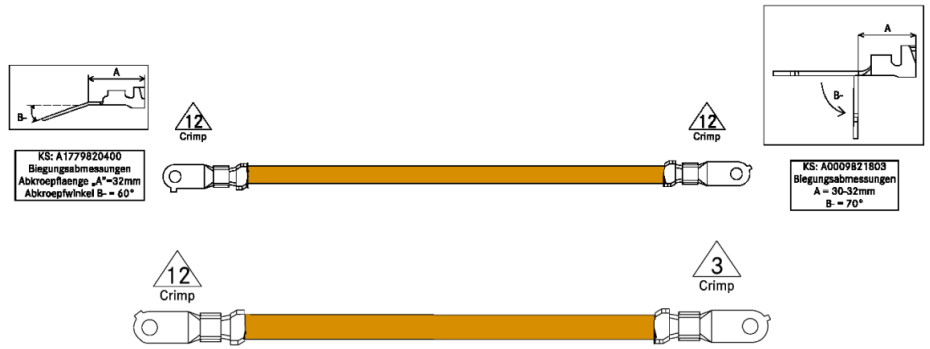



Figure 1: Assembled product

9.1 Product characteristics

Characteristic	Description	Notes
Product description	Low voltage wiring system PA	
Material number with change level	Ex: A174 540 46 24; A000 540 91 18	DRX mat. / FP nr. 8F019906 / 846C584110; 8F021515 / 846C716110
Product surfaces	Special surface limitations: No limitation.	
Dimensions [mm] (Cable Length)	300 - 1500	
Total weight [g]	Cca. 80 - 500	
ESD component	☐ Yes ☒ No	
Technical cleanliness requirements	☒ Yes ☐ No Requirements: No metallic particles >1000µm allowed on the inside neither on the outside of the connector.	In order to comply with TecSa requirements, screw heads and frame profile channels that are positioned horizontally must be covered, thus avoiding accumulation of particles.

Table 6: Product characteristics

9.3 Assembly components

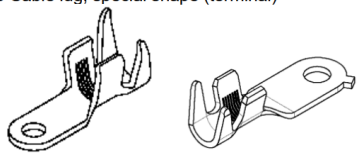Designation	Amount	Material number
Cable (Low Voltage singlecore cable 16mm²/25mm² /35mm² FLRY-B;FLR2G;) 	1 pc	L0263CXX (16mm²) L3363066 (16mm²) L3366063 (25mm²) L3369048 (35mm²)
TB Cable lug, special shape (terminal) 	1 pc	A4813709 A4813711 A4813718 A4813719 A4813725 A4816710 A4816727 A4816743 A4817942 A4817952

Task description

10 Process description

Process description

ST01 - Insertion station:
1. Manual scanning of the identification label placed on the cable into the DRX MES.
   - By scanning, the equipment receive the input data from DRX MES and load automatically the right processing program for the product variant
2. Manual insertion and positioning of the cable into the insertion unit (with possibility of buffer at least 20pcs).
   - In case that is processed the second end of cable must ensure the right orientation between the cable lugs on the two ends.
   - Insertion may only be possible in the correct position and the correct orientation (Poka Yoke)
3. Automatic fixing of cable by reaching the right position and orientation
4. Automatic checking of cable diameter correctness.
5. Automatic transfer of cable to the next station.

ST02 – Stripping station:
1. Automatic insert of cable end into the stripping unit.
2. Automatic stripping cut of insulation at the defined position.
3. Automatic removing of insulation part.
4. Automatic transfer of cable to the next station.



☒ Option: ST01+ST02 Cable dereeler, cutting, stripping and automatic insertion
1. Order receiving from DRX MES
2. Cable material identification by scanning
3. Automatic adjustment of cable and stripping length + stripping blade identification
4. Automatic cutting to length and stripping of cable
5. Automatic transfer of cable to the next process




ST03 – Crimping station:
1. Automatic feeding of cable lug on the crimping position
2. Automatic insert of cable end into the crimping unit
3. Automatic crimping/pressing of cable lug on cable
4. Automatic transfer of cable to the next station.



ST04 – Bending station:
1. Automatic insert of cable end with crimped cable lug into the bending unit
   - If no bending is requested by the order, the product is transferred automatically to the next station.
2. Automatic bending of cable lug on the predefined position “A” to the defined angle “B” in the defined direction “+” or “-”.
3. Automatic transfer of cable to the next station.






ST05 – Tinning station (soldering):
1. Automatic insert of cable end with crimped/bent cable lug into the tinning unit
2. Automatic tinning/soldering of the wires strands outcoming from crimped cable lug
3. Automatic cool down of product
4. Automatic transfer of cable to the next station.





ST06 – Quality inspection station:
1. Automatic insert of cable end with crimped/bent/tinned cable lug into the inspection unit
2. Automatic inspection of visual aspects of product
   - 360° vision system have to be implemented
3. Automatic transfer of cable to the next station.

☒ Option: ST07 – Shrinking station:
1. Automatic positioning of shrink tube on the cable lug
   - If no shrinking is requested by the order, the product is transferred automatically to the next station.
2. Automatic insert of cable end with crimped/bent/tinned cable lug into the shrinking unit
3. Automatic contraction of the shrink tube
4. Automatic cool down of product
5. Automatic transfer of cable to the next station.

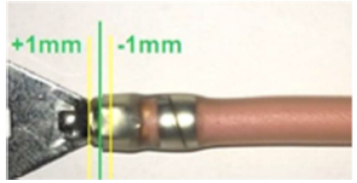


☒ Option: ST07-1_Electrical testing
1. Automatic electrical checking of each product with 4wire measurement method.

☒ Option: ST07-2_Labeling
1. Automatic attachment of an identification label to each product in the defined position

ST08 – Output station:
1. Automatic release of OK product and place on the defined position (collecting recipient)
2. Automatic separation of NOK product in the defined position (NOK box)

Task description

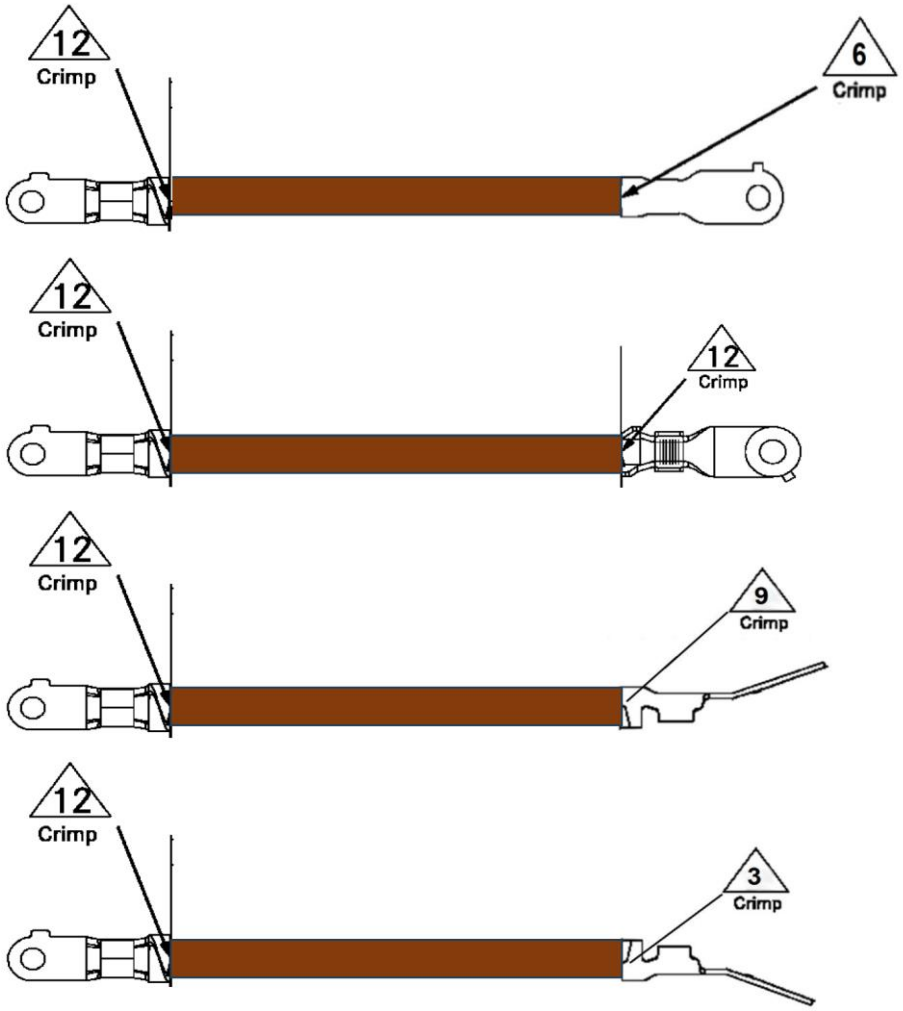


Different Orientations Crimp 1 and Crimp 2

Different Types Crimp 1 and Crimp 2


➔ Different Crimping Tools
➔ Two crimping stations

16mm² ➔ 6 Seconds target
Longer Time for bigger cross sections!

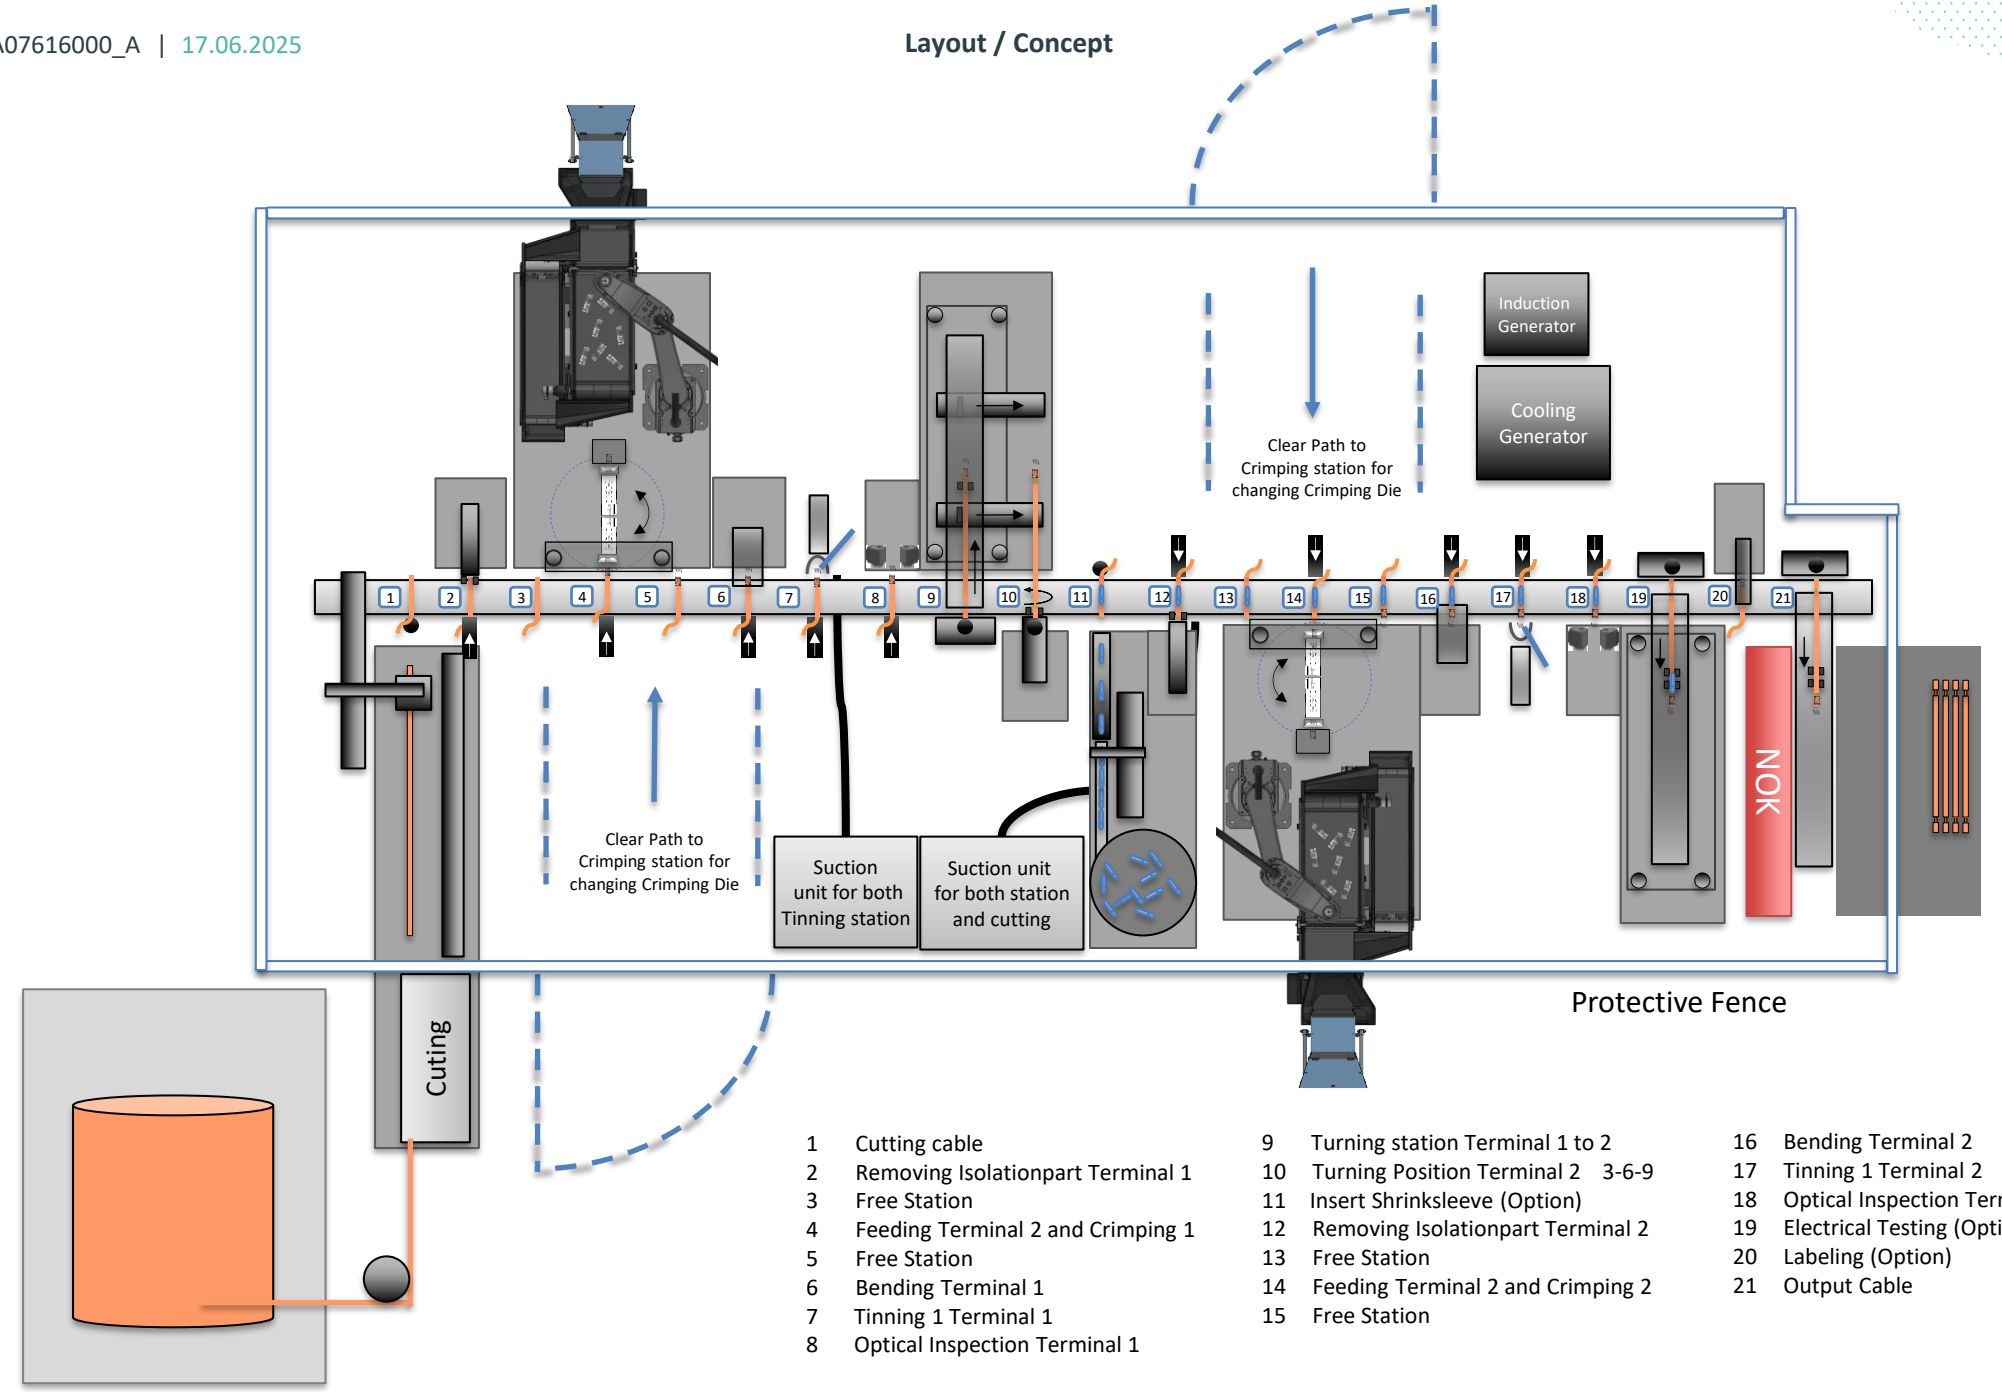

1 Cutting cable
2 Removing Isolationpart Terminal 1
3 Free Station
4 Feeding Terminal 2 and Crimping 1
5 Free Station
6 Bending Terminal 1
7 Tinning 1 Terminal 1
8 Optical Inspection Terminal 1
9 Turning station Terminal 1 to 2
10 Turning Position Terminal 2 3-6-9
11 Insert Shrinksleeve (Option)
12 Removing Isolationpart Terminal 2
13 Free Station
14 Feeding Terminal 2 and Crimping 2
15 Free Station
16 Bending Terminal 2
17 Tinning 1 Terminal 2
18 Optical Inspection Terminal 2
19 Electrical Testing (Option)
20 Labeling (Option)
21 Output Cable


Insert and cutting Cable

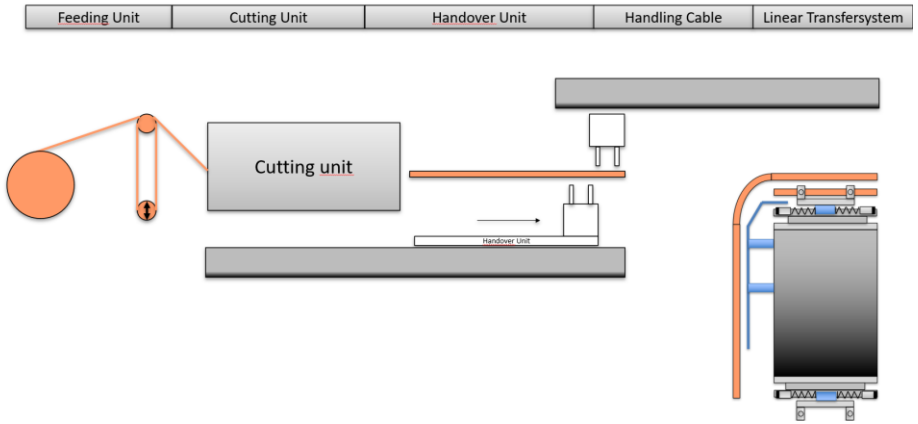

Station consisting of:

- Automatic cable unwinder for tension-free material feed for all 3 named cable cross-sections
- Cutting unit
  - For all cable types (acdording to specification)
  - Electric feed
  - Cable length from 150mm to 1500mm
  - Knife: V-shape for all cable types
- Handover unit
  - Pneumatic Cylinder y-stroke
  - Pneumatic Gripper
- Handling Cable in WPC
  - Pneumatic Cylinder y-stroke
  - Pneumatic Cylinder z-stroke
  - Pneumatic Gripper
- Base frame
- Suction unit
- Opener Unit for WPC
  - 2x pneumatic cylinders to open the gripper jaws on the WPC


Stripping Cable

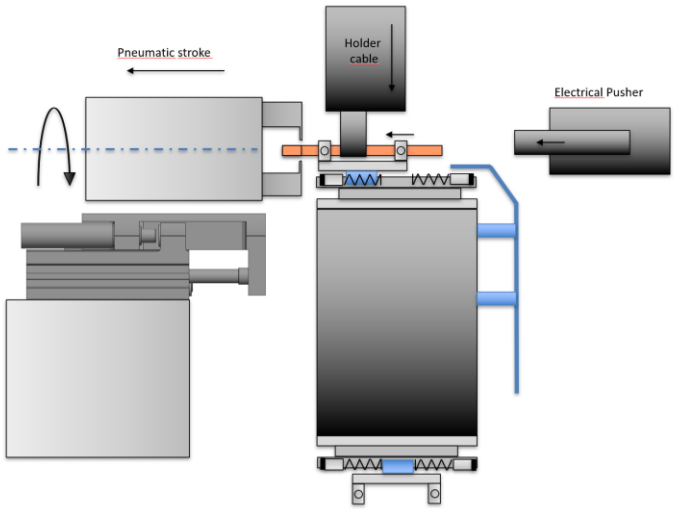

Station consisting of:

- Cutting and Pull Unit for Isolation Part
  - Pneumatic Extraction cylinder
  - Pneumatic gripper with interchangeable knives
  - 2 knifes Typ: V-blades included in the basic scope
  - Turning unit pneumatic
- Holder Cable
  - Pneumatic Cylinder
  - Pneumatic Gripper
  - Universal Gripper fingers for all cable types
- Electrical Pusher
  - Electrical cylinder for positioning cabel
  - freely adjustable in 0,1mm steps
- Extraction of the insulation ends and resulting protection
  - Suction unit size designed for 1-shift
- Base frame


Crimping Unit

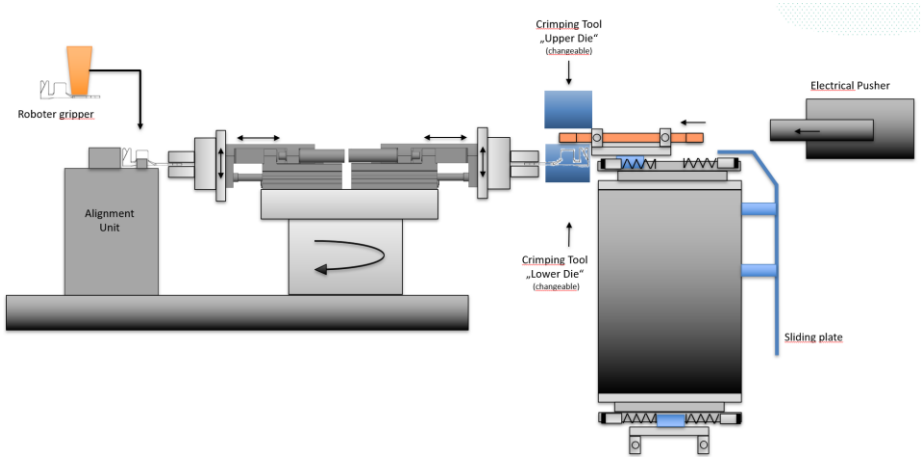

Station consisting of (including in the offer):


- Feeding Unit
  - Automatic feeding unit for all types of cable lugs
  - Cable lug hopper for 2 hours
  - Camera for position detection
  - Scara robot
  - Universal gripper for all types
- Alignment Unit
  - Universal alignment unit for all typs
  - Pneumatic gripper for centering cable lug
- Handover station for cable lug
  - Pneumatic 180° turning unit
  - 2 pneumatic zylinder for delivery cable lug
  - 2 pneumatic gripping unit with floating unit
- Electrical Pusher
  - Electrical cylinder for positioning cabel
  - freely adjustable in 0,1mm steps
- Crimp station
  - Basic structure
  - Electromechanical NC joining module Fa Kistler 0-25KN
  - Crimp tool from Schäfer (according to specification) **(supplied by Dräxlmaier)**
  - Coding for crimp tool
- Base frame
  - Welding console
  - Base plate

Bending Unit

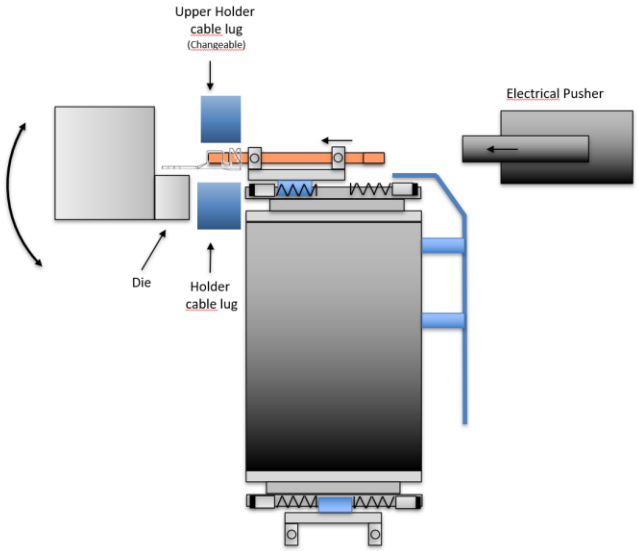


Station consisting of:

- Fixing unit for cable lug
  - Pneumatic clamping unit
  - Interchangeable jaws
  - Coding for jaws
- Bending unit
  - Electrical swivel unit
  - Adjustable from -90° till +90°
- Electrical Pusher
  - Electrical cylinder for positioning cabel
  - freely adjustable in 0,1mm steps
- Base frame



Tinning Unit

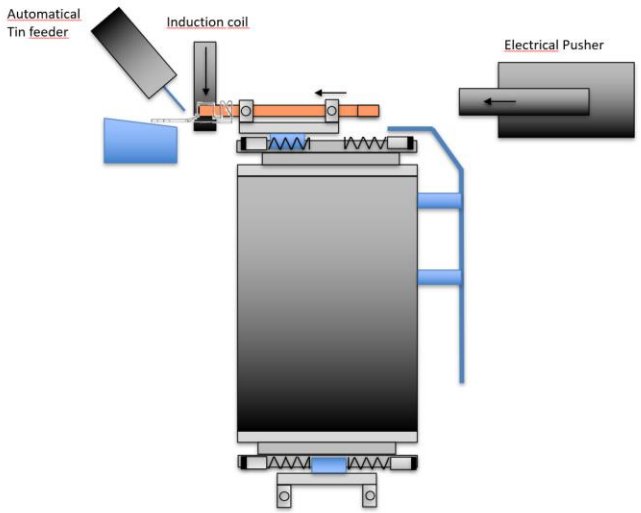

Station consisting of:

- Automatical tin feeding unit
  - Wire length and dispensing speed are customizable
  - Feeding of tin material Ø0.75 – 3.00 mm
  - x-y-positioning unit for tin supply (+/- 10mm)
- Induction coil
  - Heating temperature adjustable (ca. 20°steps are possible!)
  - Heating time ist adjustable
  - Induction generator / output power 30 kW HF
  - Inductor
  - Cooling unit
- Electrical Pusher
  - Electrical cylinder for positioning cabel
  - freely adjustable in 0,1mm steps
- Suction unit
- Base frame




Note: Exact cycle time could not yet be determined. Too many different parameters that have to be matched to each other.

- Which heating temp for different types
- Which tin diameter is the optimum for different types
- Tin quantity --> different for each type
- Tin feed speed

Interaction of all parameters for all different types can only be determined during commissioning. This can lead to a longer cycle time!

Visual Inspection Terminal

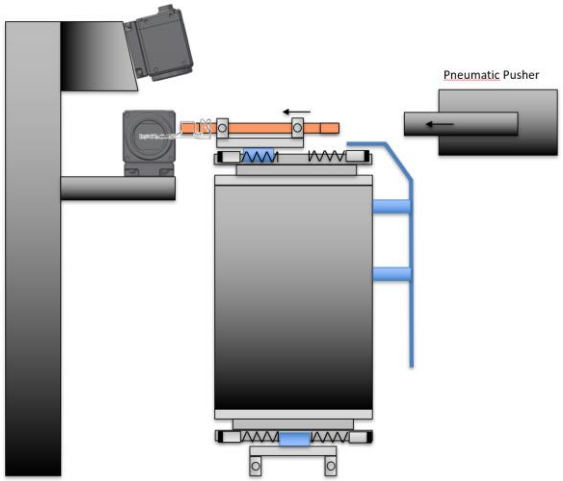


Station consisting of:


- Camera unit
  - 2x Baumer VCXG.2-127M
  - Connection cable (Netzwerk + IO), 10m
  - Lighting
  - Controller + SW-Paket + Zub RELISTE VisionController + RELISTE EasySightPro + Cognex VisionPro + 24" Monitor + Keyboard/Mouse
  - Network cards Camera integrated
  - Profinet-card
  - 1x 8TB hard disk integrated in controller
- Solid camera frame
  - Decoupled from the machine
  - Firmly anchored on the floor
- Electrical Pusher
  - Electrical cylinder for positioning cabel
  - freely adjustable in 0,1mm steps
- Housing (darkened chamber)
  - Currently not planned and therefore not included in the scope of delivery

    (no sample parts available for quotation)

Note: The camera job could not yet be tested, as no sample parts are available yet!
No statement can yet be made about the selectivity of IO/NOK
Dräxlmaier has not yet provided a precise definition of NOK

Change Unit from Terminal 1 to Terminal 2

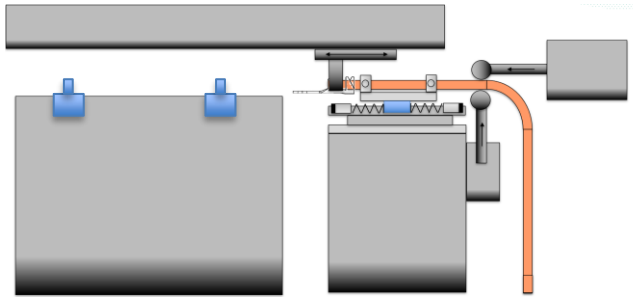


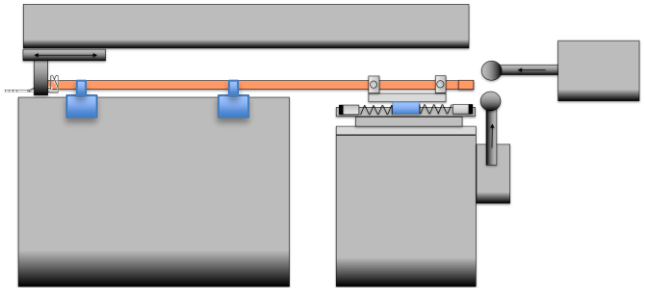

Station consisting of:

- Support unit cable
  - 2x roller guide units pneumatically delivered
- Pull unit
  - Electric pull axis
  - Pneumatic gripper
  - Universal Gripper fingers for all cable types
  - Axis frame
- Opener Unit for WPC
  - 2x pneumatic cylinders to open the gripper jaws on the WPC
- Pneumatic pusher
  - 2x pneumatic pushers that push the cable to the side when conveying it to the next station
- Base frame


Turning Unit for Terminal 2

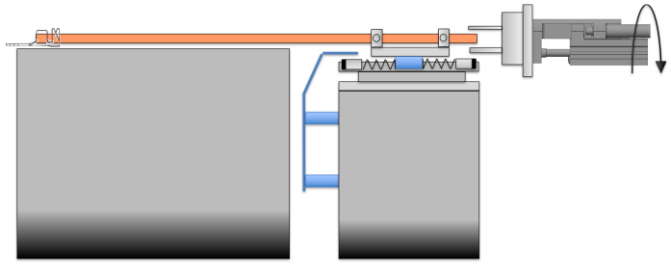


Station consisting of:

- Turning unit
  - Pneumatic turning unit
  - Pneumatic gripper
  - Universal Gripper fingers for all cable types
- Opener Unit for WPC
  - 2x pneumatic cylinders to open the gripper jaws on the WPC

Transfer system



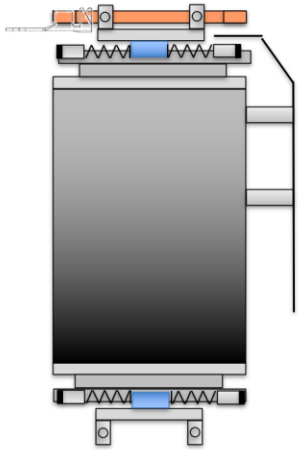



Station consisting of:

- Transfer system
  - Linear conveyor system LS-Link 150-104 Company Weiss
  - 21 process points
  - Simens SINAMICS S120
  - Gear PSC_080H
  - 300mm stroke
  - 600ms cycle time
  - Vertical orientation
  - Mounting bracket for vertical installation
- Base frame
  - Welding console
  - Firmly anchored on the floor
  - Slide plates for Cable
- WPC (48 pieces)
- Component query
  - At each process point light barrier „Part available“



Output Cable

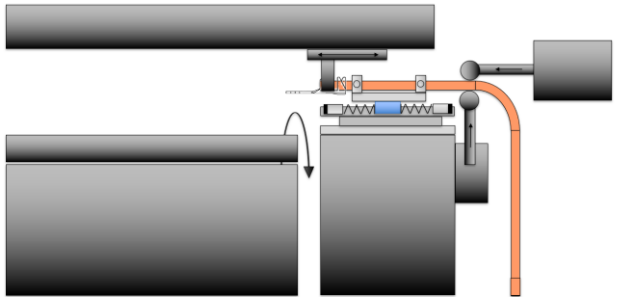

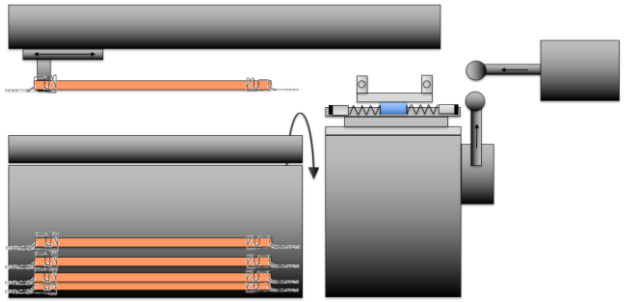

Station consisting of:

- Support unit cable
  - 2x roller guide units pneumatically delivered
- Pull unit
  - Electric pull axis
  - Pneumatic gripper
  - Universal Gripper fingers for all cable types
  - Axis frame
- Opener Unit for WPC
  - 2x pneumatic cylinders to open the gripper jaws on the WPC
- Turnout OK-NOK
- Catch Tray OK
- Catch Tray NOK
- Base frame

Control System

The control system essentially consists of the following components:

- HMI: 19" Operator Center
- Mobile Panel: KTP700F
- Controller (PLC): CPU 151xF
- Software: TIA Portal V17
- Communication: Profinet
- Decentralized Peripherals: MURR MVK
- Centralized Peripherals: ET200SP
- Servo Motor: SEW
- Pneumatics: FESTO

Software

The PLC and control panels are programmed according to the Gluth standard.

Operation

The station is operated via a 19" touchscreen Operator Center panel.
One mobile panel is also provided.
Operator guidance is provided in German and Romanian.

Installation

The system is installed using the PROFINET Safety bus system.
Careful installation, especially of moving cables, is ensured.

Cables in Cable Carriers

In our experience, cables in cable carriers are subject to varying degrees of wear, depending on speed, acceleration, and frequency of movement. For this reason, these cables are designed to be plug-in or quickly replaceable. Regular system maintenance requires inspection and, if necessary, replacement.

Performance criteria – technical data

Performance criteria - cycle time and output

To determine the cycle time, a cable with a 16mm² cross-section and 170mm length is used.

The station that is critical for the cycle time is the tinning of the cable ends.
We are currently assuming a heating time of 2 seconds and a tinning time of 2 seconds.
This gives us a cycle time of 6.5 seconds.
If the current tests result in shorter or longer times for heating and tinning, we reserve the right to adjust the cycle time accordingly.

Technical availability

Technical availability: 98%

Preliminary acceptance

The preliminary acceptance of the system is carried out in Straubing.
In a time window of 4 hours, one type each with 16mm², 25mm² and 32mm² is manufactured.

Final acceptance

The final acceptance of the system is carried out in Satu Mare.
In a time window of 8 hours, one type each with 16mm², 25mm² and 32mm² is manufactured.

The scope of delivery includes:

- Creation of the mechanical design
  - Mechanical design is carried out using Autodesk Inventor
  - Initial meeting in Satu Mare, as well as necessary clarifications and design discussions in Straubing or via Teams
  - Internal clarifications and support expenses
- Creation of the hardware and software planning
  - Hardware planning is carried out using EPLAN
  - Software programming is carried out using Siemens TIA Portal
- Procurement of purchased and manufactured parts (mechanical and electrical)
- Assembly with electrical and pneumatic installation in-house
- Final assembly and commissioning as well as preliminary acceptance of the system in-house
- Disassembly, loading, and transport
  - Transport to Satu Mare, Romania
- Reassembly and commissioning at your factory
  - Planned duration for reconstruction and commissioning: approximately 4 weeks
- Training/instruction of your employees
- Preparation of documentation
- Project management
- Weekly project meetings between Gluth and Dräxlmaier
- Setting up and creating type data for two types each with a cross-section of 16 mm² 25mm², 32mm²

The scope of delivery does not include:

- Procurement of supplies
- Spare and replacement parts
- Connection of the system to your internal power supply
  - Pneumatics
  - Electrical supply
  - Facility suction
- Installation and commissioning of types beyond the scope of delivery
- ESD-compliant design

Supplies from Dräxlmeier

When placing an order, we request the following free of charge and on time:

- Current drawings of all component variants
- Samples of all individual parts and cable variants on coils
- Consumables (e.g., solder)
- Samples in the as-manufactured state, crimped and unsoldered
- Pass/fail samples for camera selection
- Pass/fail evaluation catalog for camera selection
- Two crimping tools per type, based on design and coordination between Gluth and Dräxlmeier
- MES test system or online access
- Provision of the necessary power connections for the systems in your facility
    - for pneumatics supply
    - for electrical supply

Scope of Documentation:

The mechanical documentation is delivered once on a data storage medium in PDF format and consists of the following documents:

- Assembly drawings with parts lists
- Spare and wear parts lists
- Pneumatic and hydraulic diagrams with parts lists

The electrical documentation is delivered once on a data storage medium (CD) and consists of the following documents:

- Electrical diagram (EPLAN) with parts lists (additionally once in paper form for the control cabinet)

The software documentation is delivered once on a data storage medium (CD) and consists of:

- Program source code

The software documentation does not include:

- Program printout
- Data flow diagram

The general documentation consists of the following documents:

- Operating instructions with EC Declaration of Conformity (1x on paper in a folder)
- Accessory documentation as standard documentation from the respective suppliers (1x in PDF)

Training/Instruction:

The instruction of your employees takes place as part of the commissioning over two days at your factory and includes:

- Instruction on safety functions
- Operation of the system
- Instruction on the Testing procedures...
- Troubleshooting
- Maintenance

We ask that you release your designated specialist personnel and provide support from a German or English speaking employee.

Language

The system is available in German.

- The following documents/components are available in Romanian:
- Operating instructions
- Operating and display texts
- Accessory documentation (where available)
- Electrical diagram (path designations)
- Signage (where international symbols are not possible)

We ask for the assistance of your specialists to review or complete the translation.

Project Management

We appoint a primary project manager who will primarily be responsible for the following tasks:

- Central contact for our customer, Gluth internally, and for the suppliers of components
- Regular project status reports, as required by the project
- Planning, implementation, and moderation of design FMEAs, as well as software concept discussions
- Control of costs and deadlines
- Clarification of interfaces for components, in particular
- Support in conducting acceptance tests for components (especially interface reviews)
- Clarification and recording of any changes (change management)

However, we request support from the relevant departments, particularly with regard to existing process and product experience. This experience should be incorporated, especially in the early project phase. We would also like to point out that the customer is responsible for deadlines for components.

Technical and organizational changes during the project

If the customer subsequently requests technical or organizational changes that result in an additional charge or a delay in delivery, Gluth will provide a cost estimate or specify the delay.
Implementation of technical changes requires that the customer has placed an order for them and that Gluth has confirmed this with a corresponding order confirmation or project plan.

Service – Maintenance – Liability

- **Service Response Time**
  Our qualified specialists will be available on-site within **two days** to return the system to production status as quickly as possible. This policy applies if the request is received Monday through Thursday between 7:00 am and 4:00 pm. For service calls received after 4:00 pm, the above-mentioned deadline begins at 7:00 am on the following business day. For service calls received on Fridays after 12:15 pm., the above-mentioned deadline begins at 7:00 am on the following Monday, or by arrangement via permanent service telephone numbers.
  This response time is only valid for the Satu Mare location.

  Our company is also available on weekends and public holidays via permanent service telephone numbers. In an emergency, we will try to organize the appropriate staff to ensure you receive professional support. If telephone support is not successful, we are also available to carry out emergency service calls on weekends. Necessary, foreseeable assignments on weekends or holidays will be carried out after consultation with you.

- **Liability for Material Defects**
  Liability for material defects is 24 months, without shift restrictions, beginning on the day of handover to your premises, but no later than four weeks after delivery. For purchased parts, the period begins upon receipt at our premises. Excluded are spare and wear parts, as well as components supplied by the supplier.
  Liability for material defects applies only to newly delivered components.

- **Liability for Assembly Work**
  We are liable for damages caused by us, our vicarious agents, or our subcontractors within the scope of the statutory provisions with the following liability insurance policies (maximum coverage amounts):
  Business and product liability insurance:
  - Persoinjury and property damage (flat rate) EUR 10.000.000
  - Fire and explosion damage EUR 5.000.000
  - Industrial damage EUR 100.000
  - Financial loss EUR 100.000
  - Environmental liability insurance
  - Personal injury and property damage nal (flat rate) EUR 1.500.000

  We cannot accept liability for amounts exceeding this amount.

- **Disclaimer**
  We cannot accept liability for damages and consequential damages caused by improper use or tampering with our equipment by the operator. We also generally exclude liability if products manufactured on our equipment do not comply with legal regulations or if their use violates legal regulations.

Offer Documents

All documents provided as part of the offer process remain our property. This applies in particular to layout and concept proposals, as well as presentation materials. Any other use or disclosure to third parties requires our written consent.


Project Schedule

Terminübersicht

Dräxlmeier Satu Mare Hr. Eglseder

Automatic Production Line for Wire Processing

A07616000A 14.04.25 Schötz/Radlbeck

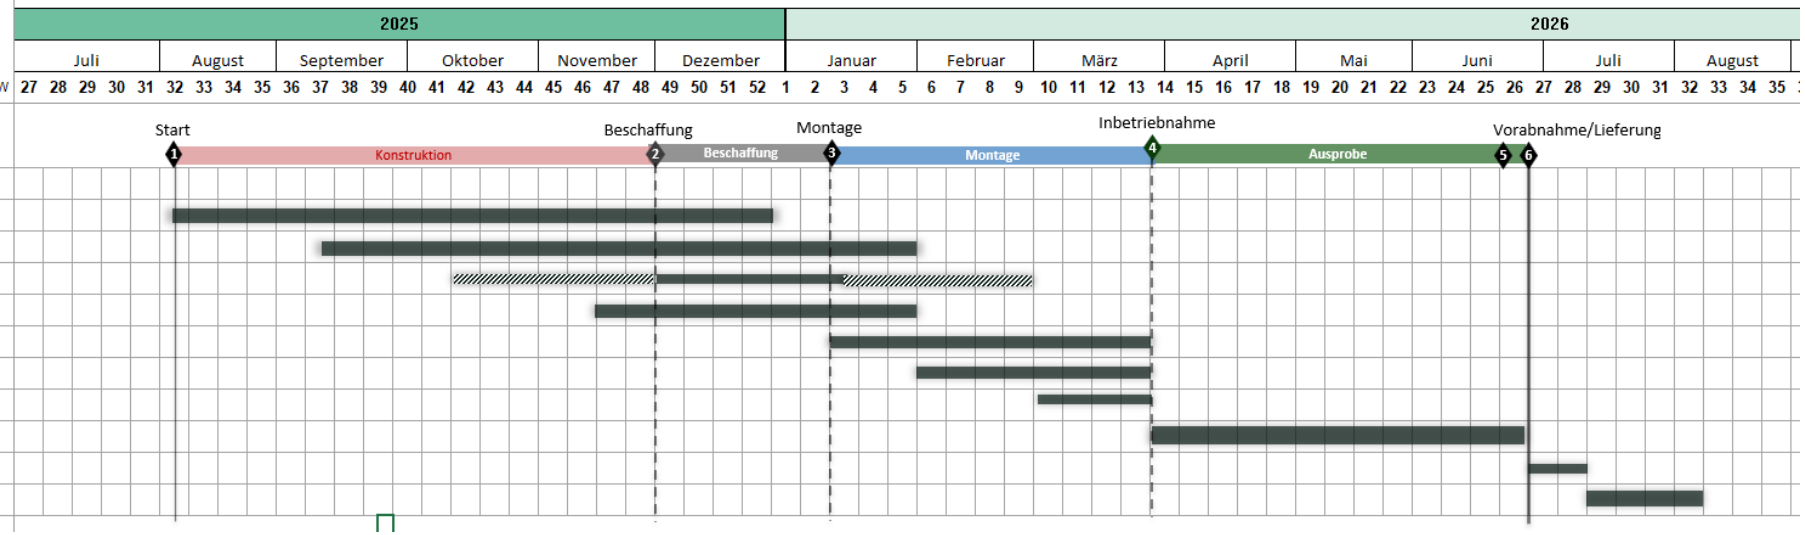

Project Prices

Basic Scope „Automatic Production Line“	**1.764.000 €**
Transport and Comissioning in Satu Mare	109.000 €
Instruction and Training	11.000 €
Documentation	23.000 €
Project Management	88.000 €
Sum total „Automatik Production Line“	1.995.000 €

Option 1: Insert Shrink Sleeve	85.500 €
Option 2: Electrical Testing	66.000 €
Option 3: Labeling	60.500 €

We would be pleased to receive your valued order and remain with kind regards

ppa. Ulrich Radlbeck

i.V. Florian Schötz

Pricing
All prices in euros and subject to statutory VAT.

Payment
30% deposit upon order placement
60% upon delivery
5% upon handover in a ready-to-use condition
5% upon acceptance, but no later than 4 weeks after the handover if final acceptance is delayed for reasons attributable to the customer.
Note: Upon delivery, we will issue a final invoice for 100% with the corresponding payment terms.

Payment term:
45 days

Offer validity:
Our prices have a validity period of 60 days, calculated from the date of offer.

Delivery:
DAP Satu Mare plant



Gluth SYSTEM TECHNIK

Gluth Systemtechnik GmbH

Steinweg 66 | 94315 Straubing

+49 9421 544-0 | info@gluth.de | www.gluth.de